


STANDARD_FINISHES COLOUR CHARL



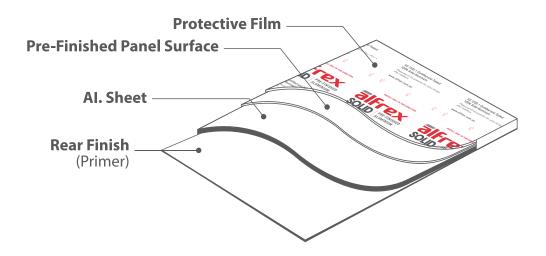

Alfrex Solid is a PPG Duranar Fluropolymer Pre-Painted Aluminium Solid Panel Manufactured by high quality Roll Coating (roll-to-roll continuous) method. It features a primer coating to protect the rear finish and can be easily fabricated to any shape or design. Alfrex Solid has no core material, giving the product superior fire resistance.

■ APPLICATIONS



Exterior facade and interior panel for new buildings and renovations.



Commercial building, high-rise apartment, factory, shopping centre.



Subway station and column cover



Re-cladding



Signage




Office and interior partition




Tunnel inner wall cladding

Solid BEIGE **CLASSIC WHITE** OFF WHITE LIGHT GRAY CREAM JY-5140 AL-5185 JY-5165 JY-5110 JY-5120 STONE GRAY SIGNAL GRAY PENCIL GRAY ANTHRACITE GRAY JY-6130 JY-6120 JY-6175 AS-1001 JY-6140 PALE BLUE BLUE YELLOW ORANGE RED JY-7130 JY-7110 AS-4160 JY-8110 JY-8120 GREEN YELLOW GREEN CHARCOAL BLACK MONUMENT JY-9120 AS-1002 AS-1003 AS-1004 JY-6220

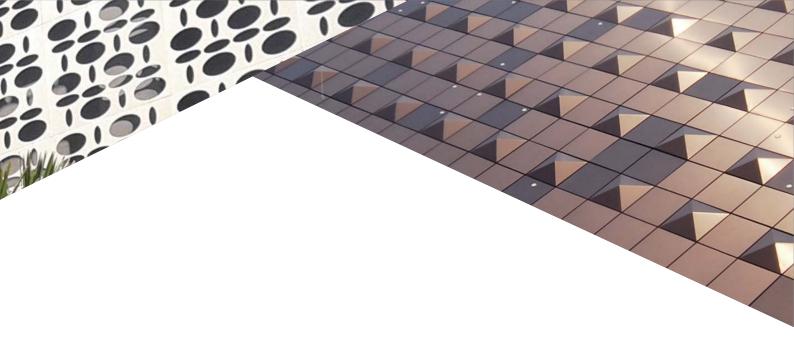

Standard Metallic



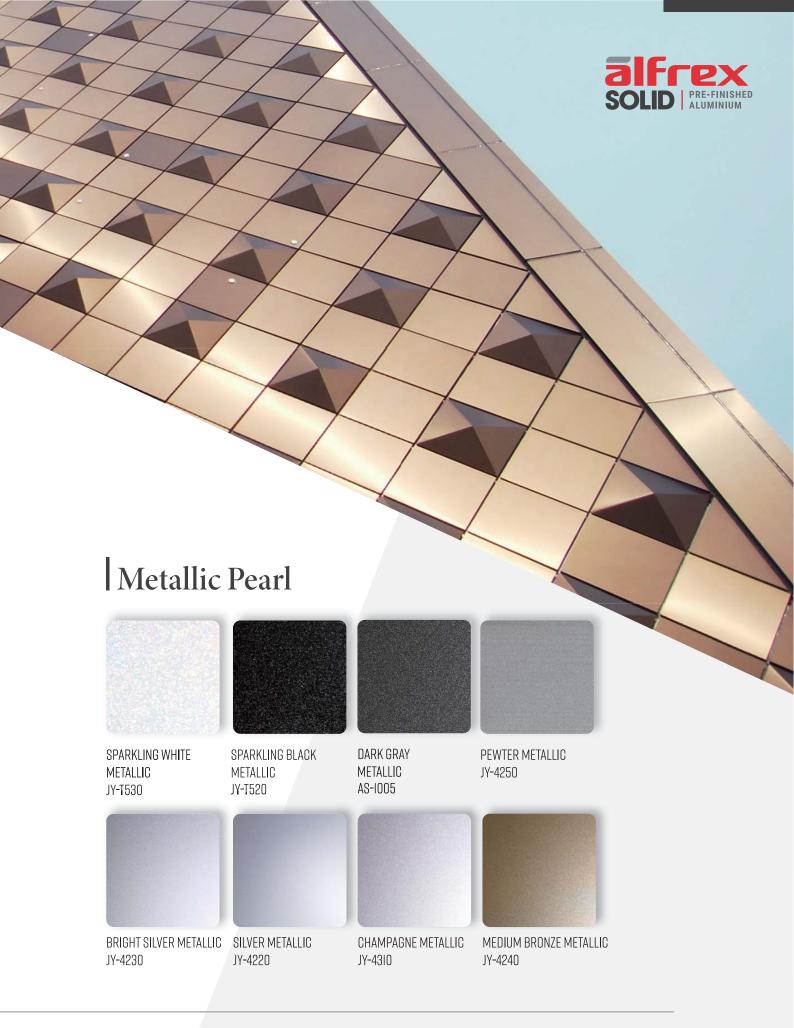

Unience Australia Pty Ltd. Oceania Regional Office

Overseas Corporations Unience USA Inc. Unience Canada Unience Korea Co. Ltd

charles@alfrexusa.com +61 424 338 484



www.alfrex.com.au

